



# NAE12S03-B DC-DC Converter

## Technical Manual

Issue 1.0  
Date 2020-06-05

HUAWEI TECHNOLOGIES CO., LTD.



## About This Document

### Purpose

This document describes the NAE12S03-B in terms of its physical structure, electrical characteristics, and simple application.

The figures provided in this document are for reference only.

### Intended Audience

This document is intended for:

- Hardware engineers
- Software engineers
- System engineers
- Technical support engineers

### Symbol Conventions

The symbols that may be found in this document are defined as follows.

| Symbol                                                                                             | Description                                                                                                                                                                                                                                 |
|----------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <b>DANGER</b>  | Indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.                                                                                                                                 |
|  <b>WARNING</b> | Indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.                                                                                                                              |
|  <b>CAUTION</b> | Indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.                                                                                                                                |
|  <b>NOTICE</b>  | Indicates a potentially hazardous situation which, if not avoided, could result in equipment damage, data loss, performance deterioration, or unanticipated results.<br>NOTICE is used to address practices not related to personal injury. |
|  <b>NOTE</b>    | Supplements the important information in the main text.<br>NOTE is used to address information not related to personal injury, equipment damage, and environment deterioration.                                                             |

## Change History

Changes between document issues are cumulative. The latest document issue contains all updates made in previous issues.


### **Issue 1.0 (2020-06-05)**

This issue is the first release.

## Contents

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>About This Document.....</b>                           | <b>i</b>  |
| <b>1 Product Overview.....</b>                            | <b>1</b>  |
| <b>2 Electrical Specifications.....</b>                   | <b>4</b>  |
| 2.1 Absolute Maximum Ratings.....                         | 4         |
| 2.2 Input Characteristics.....                            | 4         |
| 2.3 Output Characteristics.....                           | 5         |
| 2.4 Protection Characteristics.....                       | 6         |
| 2.5 Dynamic Characteristics.....                          | 7         |
| 2.6 Efficiency.....                                       | 7         |
| 2.7 Other Characteristics.....                            | 8         |
| 2.8 Reliability Characteristics.....                      | 9         |
| <b>3 Characteristic Curves.....</b>                       | <b>10</b> |
| 3.1 Test Setup Diagram & Fundamental Circuit Diagram..... | 10        |
| 3.2 Efficiency and Power Dissipation Curves.....          | 11        |
| 3.3 Thermal Considerations.....                           | 14        |
| 3.4 Turn-On/Turn-Off Waveforms.....                       | 16        |
| 3.5 Output Ripple and Noise.....                          | 18        |
| 3.6 Dynamic Load Waveform.....                            | 18        |
| <b>4 Control Features.....</b>                            | <b>19</b> |
| 4.1 Remote On/Off (EN).....                               | 19        |
| 4.2 Output Voltage Trim (FB).....                         | 19        |
| 4.3 Power Good Signal (PG).....                           | 20        |
| 4.4 Voltage Tracking (SS).....                            | 21        |
| <b>5 Protection Features.....</b>                         | <b>22</b> |
| <b>6 Qualification Testing.....</b>                       | <b>23</b> |
| <b>7 MSL Rating.....</b>                                  | <b>25</b> |
| <b>8 Thermal Consideration.....</b>                       | <b>26</b> |
| <b>9 Package Information.....</b>                         | <b>27</b> |
| <b>10 Mechanical Consideration (Soldering).....</b>       | <b>28</b> |

# 1 Product Overview

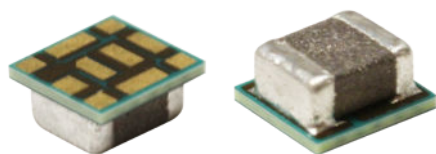

The NAE12S03-B is a power supply in a package (PSiP) DC-DC converter with an input voltage range of 6.3 V to 14.0 V and the maximum output current of 3.0 A.

#### Mechanical Features

- SMT
- Dimensions (L x W x H): 3.0 mm x 2.8 mm x 1.6 mm (0.118 in. x 0.110 in. x 0.063 in.)
- Weight: 0.05 g

#### Control Features

Remote on/off

#### Operational Features

- Input voltage: 6.3–14.0 V
- Output current: 0–3 A
- Output voltage: 0.8–5.2 V
- Efficiency: 92% (50% load,  $V_{in} = 12$  V;  $V_{out} = 5.2$  V;  $T_A = 25^\circ\text{C}$ )

#### Protection Features

- Input undervoltage protection
- Output overcurrent protection
- Overtemperature protection

#### Environmental Protection

- RoHS6 complaint, lead-free reflow soldering
- China RoHS

#### Applications

Servers

#### Model Naming Convention

|     |    |   |    |   |   |
|-----|----|---|----|---|---|
| NAE | 12 | S | 03 | — | B |
| 1   | 2  | 3 | 4  |   | 5 |

1 — Non-isolated, analog, package type

2 — Input voltage: 12 V

3 — Single output

4 — Output current: 3 A


5 — Extension code

## Mechanical Diagram

Figure 1-1 Mechanical diagram

### NOTE

All dimensions are in the unit of  $\mu\text{m}$  unless otherwise specified. Tolerances:  $\pm 30 \mu\text{m}$

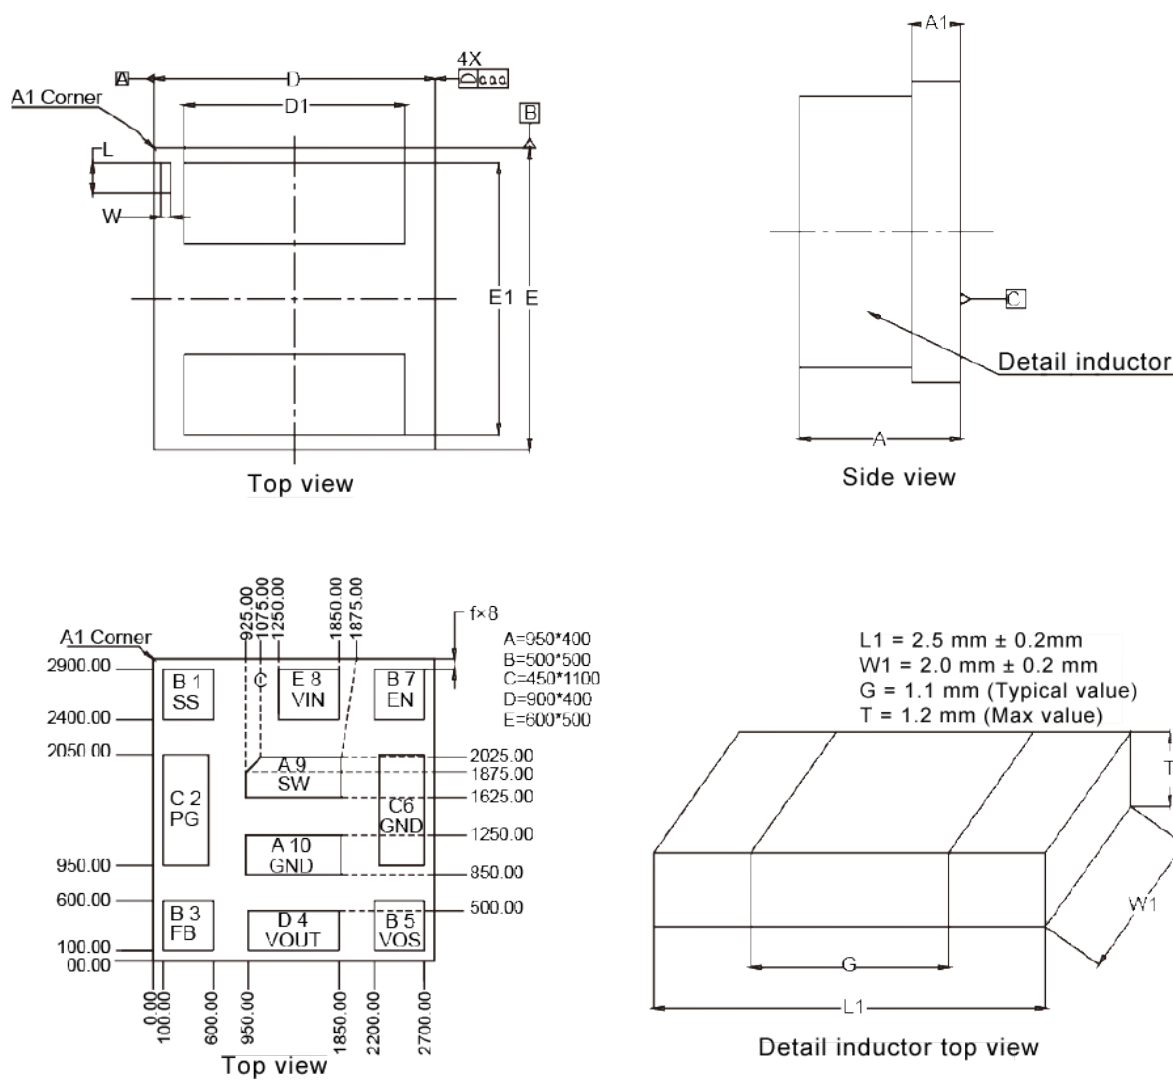

| Symbol | Minimum (mm) | Typical (mm) | Maximum (mm) |
|--------|--------------|--------------|--------------|
| A      | -            | -            | 1.60         |
| A1     | 0.240        | 0.285        | 0.330        |
| D      | 2.70         | 2.80         | 2.90         |
| E      | 2.90         | 3.00         | 3.10         |

| Symbol | Minimum (mm)         | Typical (mm) | Maximum (mm) |
|--------|----------------------|--------------|--------------|
| D1     | 2.15                 | 2.20         | 2.25         |
| E1     | 2.65                 | 2.70         | 2.75         |
| L      | 0.30 (typical value) |              |              |
| W      | 0.10 (typical value) |              |              |
| f      | 0.10 (typical value) |              |              |
| aaa    | 0.08 (basic value)   |              |              |

**Table 1-1** Pin description

| Name             | Function                                                                                                                                            |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| SS               | Soft startup and voltage tracking pin. An external capacitor connected to this pin sets the internal reference voltage rise time.                   |
| PG               | Power good signal. This is an open-drain signal. The pull-up resistor cannot be connected to any voltage higher than 6 V. If unused, leave it open. |
| FB               | Output adjustment pin. A resistor divider connecting the feedback to the GND is used to set the desired output voltage.                             |
| V <sub>out</sub> | Output pins. Connect these pins to loads and place output filter capacitors between these pins and GND pins.                                        |
| VOS              | Output voltage sense pin. This pin must be directly connected to the output capacitor.                                                              |
| EN               | Enable pin. A high level enables the converter while a low level disables the converter.                                                            |
| V <sub>in</sub>  | Power input pins. Connect these pins to input power supply and place input filter capacitors between these pins and GND pins.                       |
| SW               | Switching node of the circuit. This pin is used to check the switching frequency.                                                                   |
| GND              | Input and output power ground. Connect these pins to the ground electrode of the input and output filter capacitors.                                |



# 2 Electrical Specifications

## 2.1 Absolute Maximum Ratings

| Parameter                                | Minimum | Typical | Maximum      | Unit | Notes & Conditions                                                                                                                                                           |
|------------------------------------------|---------|---------|--------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input voltage (continuous)               | -       | -       | 15           | V    | $V_{in} = 18\text{ V}$ , $t \leq 100\text{ ms}$ , or $V_{in} = 19\text{ V}$ , $t \leq 1\text{ ms}$ , the converter must not be damaged.                                      |
| Operating ambient temperature ( $T_A$ )  | -40     | -       | 85           | °C   | If the converter meets either of the conditions ( $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$ or $T_j = -40^\circ\text{C}$ to $+125^\circ\text{C}$ ), it is acceptable. |
| Operating junction temperature ( $T_j$ ) | -40     | -       | 125          | °C   |                                                                                                                                                                              |
| Storage temperature                      | -55     | -       | 125          | °C   | -                                                                                                                                                                            |
| Operating humidity                       | 5       | -       | 95           | % RH | Non-condensing                                                                                                                                                               |
| External voltage applied to On/Off       | -0.3    | -       | $V_{in}+0.3$ | V    | -                                                                                                                                                                            |

## 2.2 Input Characteristics

| Parameter               | Minimum | Typical | Maximum | Unit | Notes & Conditions                                                         |
|-------------------------|---------|---------|---------|------|----------------------------------------------------------------------------|
| Operating input voltage | 6.3     | 12      | 14      | V    | $0.8\text{ V} \leq V_{out} \leq 2.5\text{ V}$                              |
|                         | 9       | 12      | 14      | V    | $V_{out} > 2.5\text{ V}$                                                   |
| Maximum input current   | -       | -       | 5       | A    | $V_{in} = 0\text{--}14\text{ V}$ ; $I_{out} = I_{onom}$                    |
| No-load power           | -       | -       | 0.2     | W    | $V_{in} = 12\text{ V}$ ; $V_{out} = 3.3\text{ V}$ ; $I_{out} = 0\text{ A}$ |



| Parameter                           | Minimum | Typical | Maximum | Unit          | Notes & Conditions                                                                                  |
|-------------------------------------|---------|---------|---------|---------------|-----------------------------------------------------------------------------------------------------|
| Input capacitance                   | 20      | -       | -       | $\mu\text{F}$ | Ceramic capacitor                                                                                   |
| Inrush transient                    | -       | -       | 7       | A             | 100% load, $V_{\text{in}}$ slew rate $\leq 10 \text{ V/ms}$ , output capacitance = $44 \mu\text{F}$ |
|                                     | -       | -       | 2       | A             | No load, $V_{\text{in}}$ slew rate $\leq 10 \text{ V/ms}$ , output capacitance = $44 \mu\text{F}$   |
| Input ripple voltage (peak to peak) | -       | -       | 500     | mV            | $V_{\text{in}} = 6.3\text{--}14 \text{ V}$ , oscilloscope bandwidth: 20 MHz                         |
| Altitude                            | -       | 4000    | -       | m             | -                                                                                                   |

## 2.3 Output Characteristics

| Parameter                   | Minimum | Typical | Maximum | Unit                  | Notes & Conditions                                                                                                                            |
|-----------------------------|---------|---------|---------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Output voltage setpoint     | -2.0    | -       | 2.0     | % $V_{\text{oset}}$   | $V_{\text{in}} = 12 \text{ V}$ ; $I_{\text{out}} = 50\% I_{\text{onom}}$ (with 1% tolerance for external resistor used to set output voltage) |
| Output voltage              | 0.8     | -       | 2.5     | V                     | $V_{\text{in}} = 6.3\text{--}14 \text{ V}$                                                                                                    |
|                             | 2.5     | -       | 5.2     | V                     | $V_{\text{in}} = 9\text{--}14 \text{ V}$ (not include $V_{\text{out}} = 2.5 \text{ V}$ )                                                      |
| Output current              | 0       | -       | 3       | A                     | $V_{\text{in}} = 6.3\text{--}14 \text{ V}$ , $0.8 \text{ V} \leq V_{\text{out}} \leq 2.5 \text{ V}$                                           |
|                             | 0       | -       | 2       | A                     | $V_{\text{in}} = 9\text{--}14 \text{ V}$ , $V_{\text{out}} > 2.5 \text{ V}$                                                                   |
| Line regulation             | -1      | -       | 1       | %                     | $V_{\text{in}} = 6.3\text{--}14 \text{ V}$ ; $I_{\text{out}} = I_{\text{onom}}$                                                               |
| Load regulation             | -2      | -       | 2       | %                     | $V_{\text{in}} = 6.3\text{--}14 \text{ V}$ ; $I_{\text{out}} = I_{\text{omin}} - I_{\text{onom}}$                                             |
| Regulated voltage precision | -3      | -       | 3       | %                     | $V_{\text{in}} = 6.3\text{--}14 \text{ V}$ ; $I_{\text{out}} = I_{\text{omin}} - I_{\text{onom}}$                                             |
| Temperature coefficient     | -0.02   | -       | 0.02    | %/ $^{\circ}\text{C}$ | $T_{\text{A}} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$                                                                                 |

| Parameter                              | Minimum | Typical | Maximum | Unit          | Notes & Conditions                                                                                                                                                      |
|----------------------------------------|---------|---------|---------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| External capacitance                   | 44      | -       | 544     | $\mu\text{F}$ | $V_{\text{out}} = 0.8\text{--}5.2\text{ V}$ ; 500 $\mu\text{F}$ ceramic capacitor or 200 $\mu\text{F}$ polymer aluminum capacitor + 300 $\mu\text{F}$ ceramic capacitor |
| Output ripple and noise (peak to peak) | -       | -       | 30      | mV            | $V_{\text{out}} < 2.5\text{ V}$ ; oscilloscope bandwidth: 20 MHz; CCM mode                                                                                              |
|                                        | -       | -       | 50      | mV            | $V_{\text{out}} < 2.5\text{ V}$ ; oscilloscope bandwidth: 20 MHz; DCM mode                                                                                              |
|                                        | -       | -       | 50      | mV            | $V_{\text{out}} \geq 2.5\text{ V}$ ; oscilloscope bandwidth: 20 MHz; CCM mode                                                                                           |
|                                        | -       | -       | 60      | mV            | $V_{\text{out}} \geq 2.5\text{ V}$ ; oscilloscope bandwidth: 20 MHz; DCM mode                                                                                           |
| Output voltage overshoot               | -       | -       | 5       | %             | Full range of $V_{\text{in}}$ , $I_{\text{out}}$ , and $T_{\text{A}}$                                                                                                   |
| Output voltage rise time               | 0.50    | 1.65    | 6.00    | ms            | $V_{\text{out}} = 0.8\text{--}5.2\text{ V}$ ; from 10% $V_{\text{out}}$ to 90% $V_{\text{out}}$ after power-on through the EN signal                                    |
| Switching frequency                    | -       | 2000    | -       | kHz           | $V_{\text{out}} = 1.8\text{ V}$ ; $I_{\text{out}} = 1\text{ A}$                                                                                                         |

## 2.4 Protection Characteristics

| Parameter                     | Minimum | Typical | Maximum | Unit | Notes & Conditions                                                                                                                                                                                                                 |
|-------------------------------|---------|---------|---------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input undervoltage protection |         |         |         |      | <ul style="list-style-type: none"> <li>Define the voltage at which the chip logic starts to work as the startup threshold.</li> <li>Define the voltage at which the chip logic stops to work as the shutdown threshold.</li> </ul> |
| Startup threshold             | 3.9     | 4.7     | 5.2     | V    |                                                                                                                                                                                                                                    |
| Shutdown threshold            | 3.6     | 4.4     | 4.9     | V    |                                                                                                                                                                                                                                    |
| Hysteresis threshold          | 0.1     | 0.3     | 0.6     | V    |                                                                                                                                                                                                                                    |

| Parameter                     | Minimum | Typical | Maximum | Unit | Notes & Conditions                                                                                                                             |
|-------------------------------|---------|---------|---------|------|------------------------------------------------------------------------------------------------------------------------------------------------|
| Output overcurrent protection | 3.1     | -       | -       | A    | -                                                                                                                                              |
| Overtemperature protection    |         |         |         |      | Overtemperature protection is implemented based on $T_j$ . The converter internal temperature can be obtained by the thermal resistance model. |
| Threshold threshold           | 130     | 160     | 170     | °C   |                                                                                                                                                |
| Hysteresis threshold          | 5       | 20      | 40      | °C   |                                                                                                                                                |

## 2.5 Dynamic Characteristics

| Parameter           | Minimum | Typical | Maximum | Unit                | Notes & Conditions                |
|---------------------|---------|---------|---------|---------------------|-----------------------------------|
| Overshoot amplitude | -       | -       | 5       | % $V_{out}$ $\mu s$ | Current change rate: 5 A/ $\mu s$ |
| Recovery time       | -       | -       | 200     |                     | Load: 25%–50%–25%;<br>50%–75%–50% |

## 2.6 Efficiency

| Parameter | Minimum | Typical | Maximum | Units | Notes & Conditions                                                           |
|-----------|---------|---------|---------|-------|------------------------------------------------------------------------------|
| 50% load  | 65.0    | 76.0    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 0.8\text{ V}$ ; $T_A = 25^\circ\text{C}$ |
|           | 68.5    | 77.0    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 0.9\text{ V}$ ; $T_A = 25^\circ\text{C}$ |
|           | 70.5    | 78.0    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 1.0\text{ V}$ ; $T_A = 25^\circ\text{C}$ |
|           | 74.0    | 79.5    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 1.2\text{ V}$ ; $T_A = 25^\circ\text{C}$ |
|           | 77.5    | 81.5    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 1.5\text{ V}$ ; $T_A = 25^\circ\text{C}$ |
|           | 81.5    | 83.0    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 1.8\text{ V}$ ; $T_A = 25^\circ\text{C}$ |
|           | 84.5    | 86.0    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 2.5\text{ V}$ ; $T_A = 25^\circ\text{C}$ |
|           | 87.5    | 89.0    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 3.3\text{ V}$ ; $T_A = 25^\circ\text{C}$ |
|           | 90.0    | 91.5    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 5.0\text{ V}$ ; $T_A = 25^\circ\text{C}$ |
|           | 90.5    | 92.0    | -       | %     | $V_{in} = 12\text{ V}$ ; $V_{out} = 5.2\text{ V}$ ; $T_A = 25^\circ\text{C}$ |

| Parameter | Minimum | Typical | Maximum | Units | Notes & Conditions                                                     |
|-----------|---------|---------|---------|-------|------------------------------------------------------------------------|
| 100% load | 60.0    | 66.5    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 0.8\text{ V}; T_A = 25^\circ\text{C}$ |
|           | 61.5    | 68.0    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 0.9\text{ V}; T_A = 25^\circ\text{C}$ |
|           | 63.5    | 69.5    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 1.0\text{ V}; T_A = 25^\circ\text{C}$ |
|           | 67.5    | 72.0    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 1.2\text{ V}; T_A = 25^\circ\text{C}$ |
|           | 70.5    | 75.0    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 1.5\text{ V}; T_A = 25^\circ\text{C}$ |
|           | 76.0    | 77.5    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 1.8\text{ V}; T_A = 25^\circ\text{C}$ |
|           | 79.5    | 81.0    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 2.5\text{ V}; T_A = 25^\circ\text{C}$ |
|           | 86.0    | 87.5    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 3.3\text{ V}; T_A = 25^\circ\text{C}$ |
|           | 89.0    | 90.5    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 5.0\text{ V}; T_A = 25^\circ\text{C}$ |
|           | 89.5    | 91.0    | -       | %     | $V_{in} = 12\text{ V}; V_{out} = 5.2\text{ V}; T_A = 25^\circ\text{C}$ |

## 2.7 Other Characteristics

| Parameter                                  | Minimum | Typical | Maximum      | Unit        | Notes & Conditions |
|--------------------------------------------|---------|---------|--------------|-------------|--------------------|
| Remote On/Off voltage                      |         |         |              | V           | Positive logic     |
| Low level                                  | -0.2    | -       | 0.3          | V           |                    |
| High level                                 | 0.9     | -       | $V_{in}+0.3$ |             |                    |
| PG high threshold<br>(FB from low to high) | 92      | 95      | 99           | % $V_{ref}$ | -                  |
| PG low threshold<br>(FB from high to low)  | 87      | 90      | 94           | % $V_{ref}$ | -                  |


## 2.8 Reliability Characteristics

| Parameter                         | Minimum | Typical | Maximum | Unit          | Notes & Conditions                                                                                                                                                         |
|-----------------------------------|---------|---------|---------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mean time between failures (MTBF) | -       | 25      | -       | Million hours | Based on JEP122 and JESD85, Active energy $E_a=0.7\text{eV}$ , $T_{\text{use}} = 55^{\circ}\text{C}$ , $T_{\text{stress}} = 125^{\circ}\text{C}$ , Confidence Level is 60% |

# 3 Characteristic Curves

## 3.1 Test Setup Diagram & Fundamental Circuit Diagram

Figure 3-1 Test setup diagram

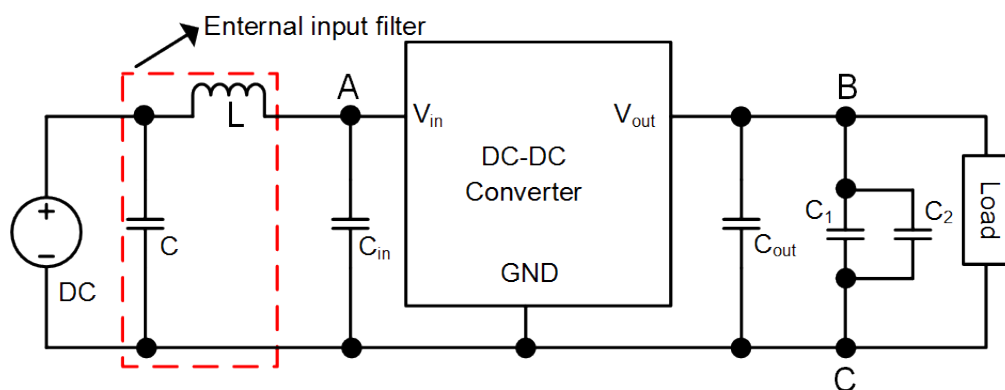

$C_{in}$ : The 20  $\mu\text{F}$  ceramic capacitor is recommended.

$C_1$ : The 0.1  $\mu\text{F}$  ceramic capacitor is recommended.


$C_{out}$ : The 44  $\mu\text{F}$  ceramic capacitor is recommended.

$C_2$ : The 10  $\mu\text{F}$  ceramic capacitor is recommended.

### NOTE

1. Measure the input current ripple at A shown in [Figure 3-1](#).
2. During the test of input reflected ripple current, the input terminal must be connected to a 12  $\mu\text{H}$  inductor and a 220  $\mu\text{F}$  electrolytic capacitor.
3. Points B and C are used for testing the output voltage ripple.

**Figure 3-2** Fundamental circuit diagram

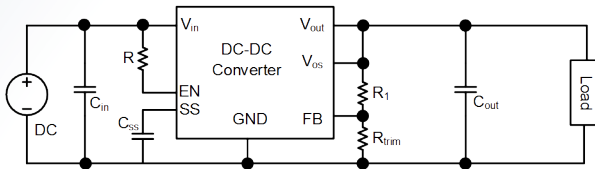

$C_{in}$ : The 20  $\mu$ F ceramic capacitor is recommended.


$C_{out}$ : The 44  $\mu$ F ceramic capacitor is recommended.

$R_1$ : 10 k $\Omega$


$C_{ss}$ : The 3.3 nF ceramic capacitor is recommended.

## 3.2 Efficiency and Power Dissipation Curves



Conditions:  $T_A = 25^\circ\text{C}$ ,  $V_{in} = 12\text{ V}$  unless otherwise specified

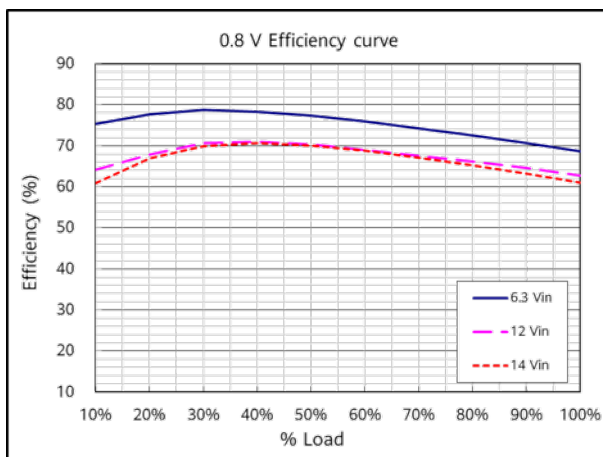

Efficiency curve ( $V_{out} = 0.8\text{ V}$ )

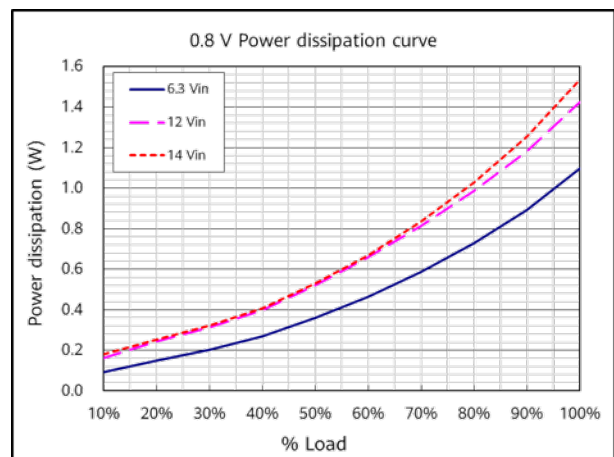


Power dissipation curve ( $V_{out} = 0.8\text{ V}$ )

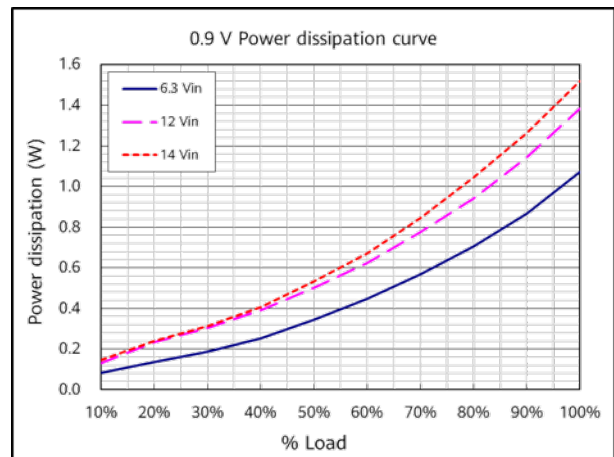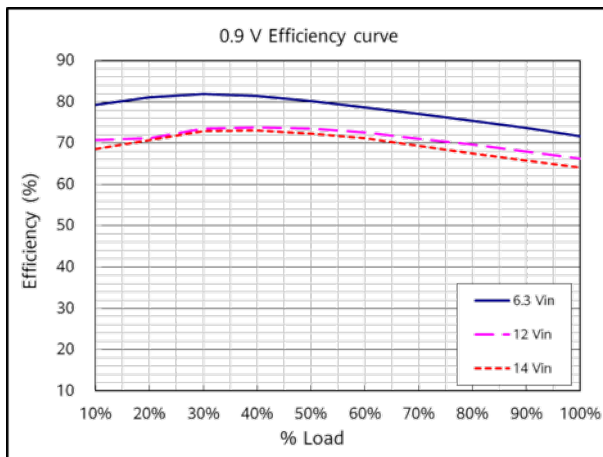





Efficiency curve ( $V_{out} = 0.9\text{ V}$ )

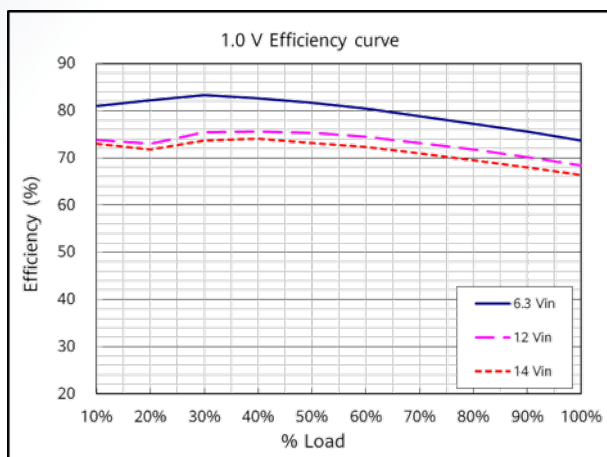


Power dissipation curve ( $V_{out} = 0.9\text{ V}$ )

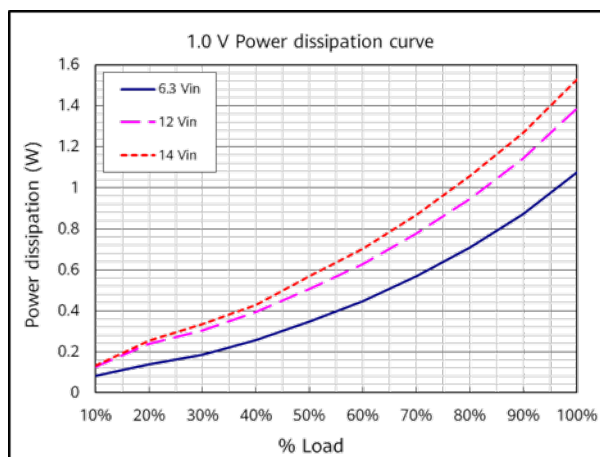


Efficiency curve ( $V_{out} = 1.0\text{ V}$ )

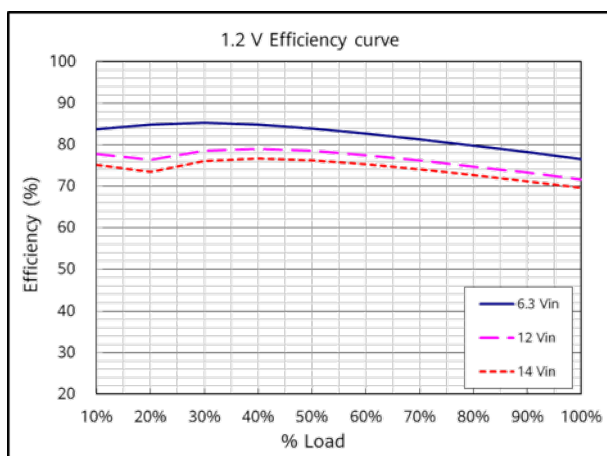


Power dissipation curve ( $V_{out} = 1.0\text{ V}$ )

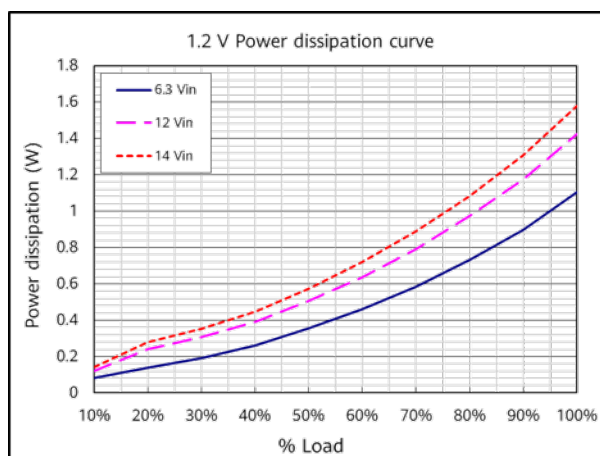

Efficiency curve ( $V_{out} = 1.2\text{ V}$ )

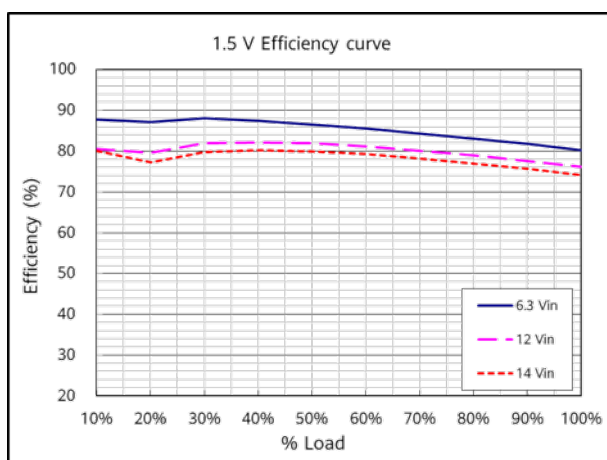


Power dissipation curve ( $V_{out} = 1.2\text{ V}$ )

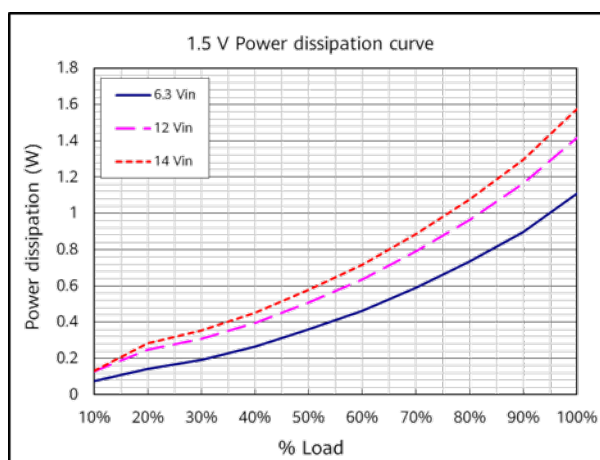


Efficiency curve ( $V_{out} = 1.5\text{ V}$ )


Power dissipation curve ( $V_{out} = 1.5\text{ V}$ )

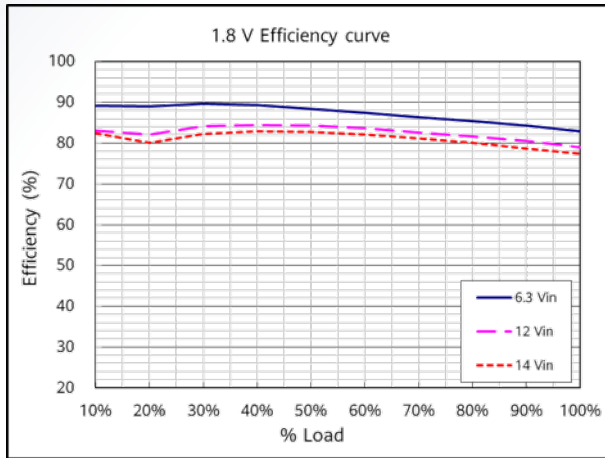


Efficiency curve ( $V_{out} = 1.8 \text{ V}$ )

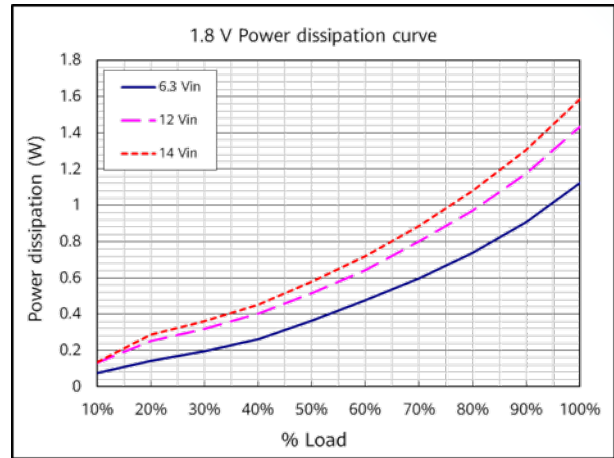


Power dissipation curve ( $V_{out} = 1.8 \text{ V}$ )

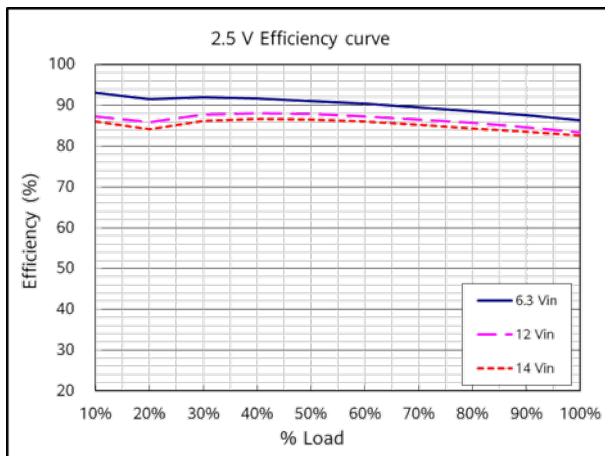


Efficiency curve ( $V_{out} = 2.5 \text{ V}$ )

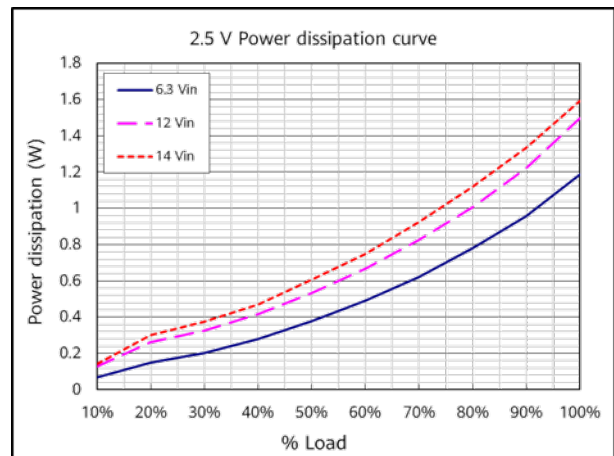


Power dissipation curve ( $V_{out} = 2.5 \text{ V}$ )

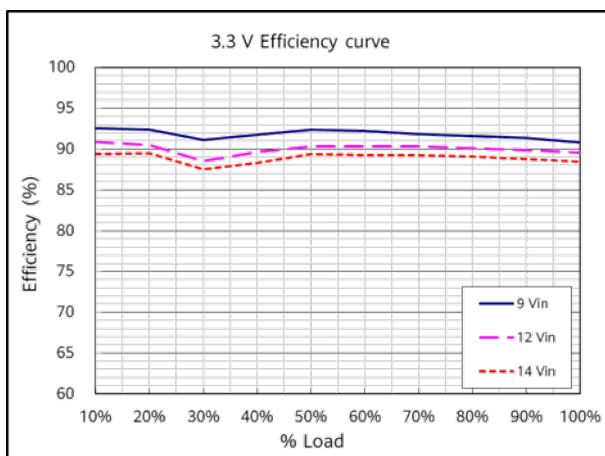


Efficiency curve ( $V_{out} = 3.3 \text{ V}$ )

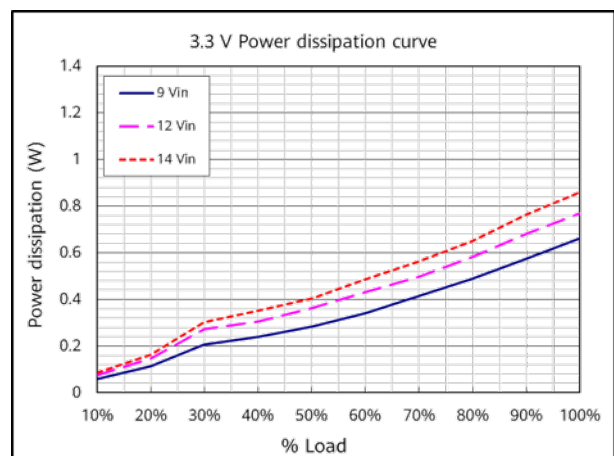


Power dissipation curve ( $V_{out} = 3.3 \text{ V}$ )

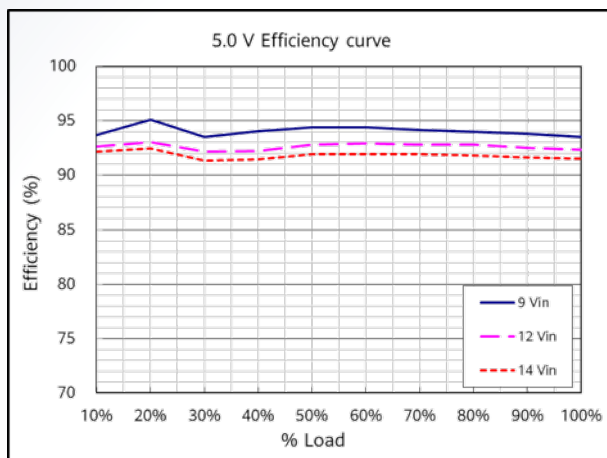


Efficiency curve ( $V_{out} = 5.0$  V)

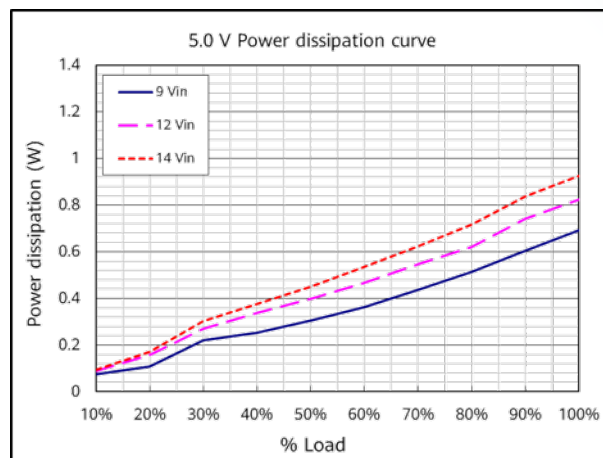

Power dissipation curve ( $V_{out} = 5.0$  V)

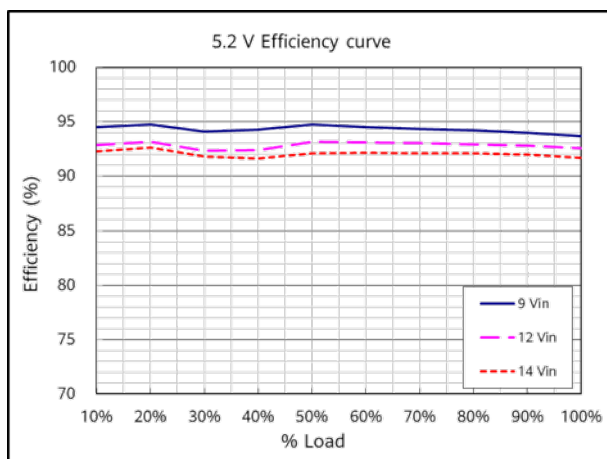


Efficiency curve ( $V_{out} = 5.2$  V)

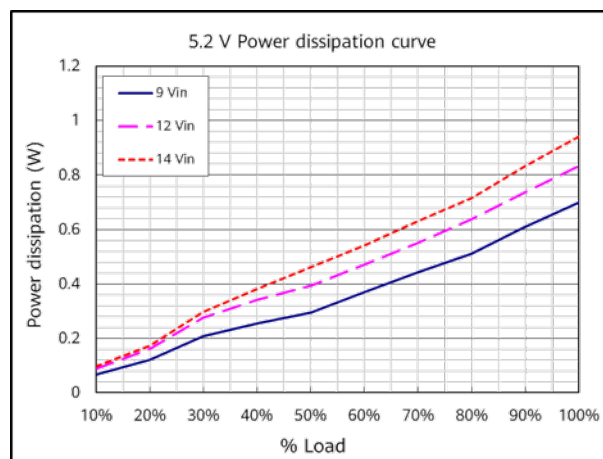


Power dissipation curve ( $V_{out} = 5.2$  V)

## 3.3 Thermal Considerations


Sufficient airflow should be provided to ensure reliable operating of the converter. Therefore, thermal components are mounted on the top surface of the converter to dissipate heat to the surrounding environment by conduction, convection, and radiation. Proper airflow can be verified by measuring the temperature at the surface of the converter.

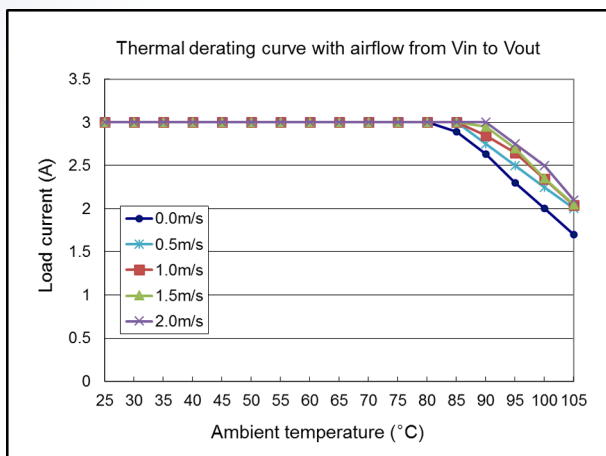


Thermal derating with airflow from  $V_{in}$  to  $V_{out}$  ( $V_{in} = 12\text{ V}$ ;  $V_{out} = 0.8\text{ V}$ )

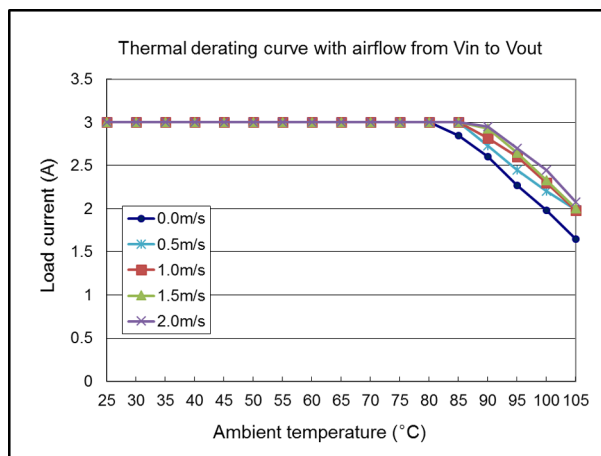



Thermal derating with airflow from  $V_{in}$  to  $V_{out}$  ( $V_{in} = 12\text{ V}$ ;  $V_{out} = 0.9\text{ V}$ )

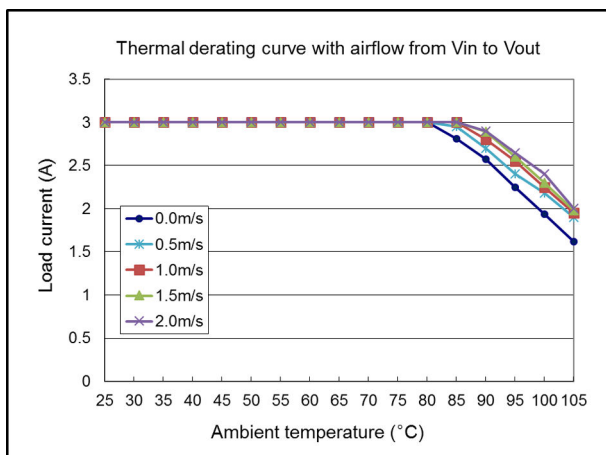


Thermal derating with airflow from  $V_{in}$  to  $V_{out}$  ( $V_{in} = 12\text{ V}$ ;  $V_{out} = 1.0\text{ V}$ )

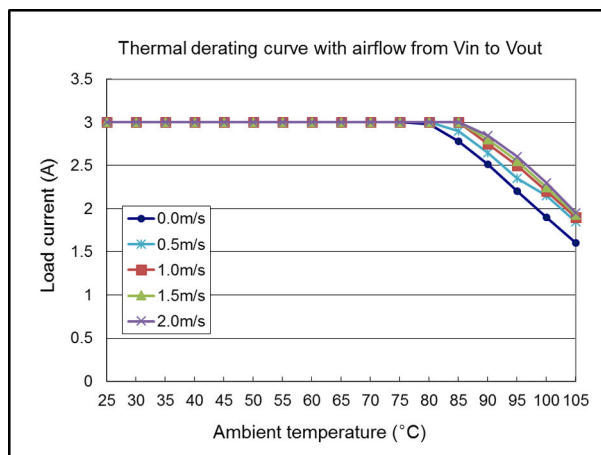


Thermal derating with airflow from  $V_{in}$  to  $V_{out}$  ( $V_{in} = 12\text{ V}$ ;  $V_{out} = 1.2\text{ V}$ )

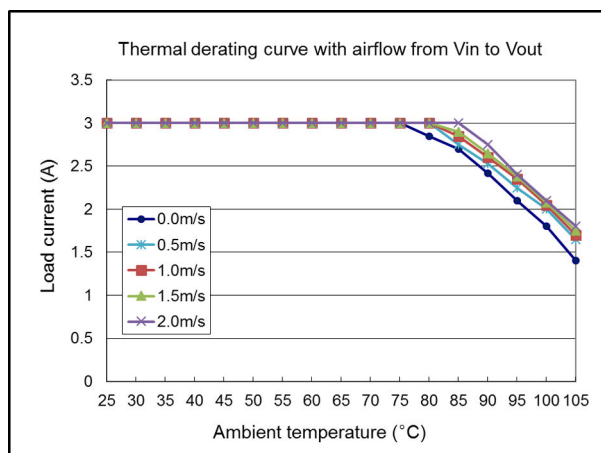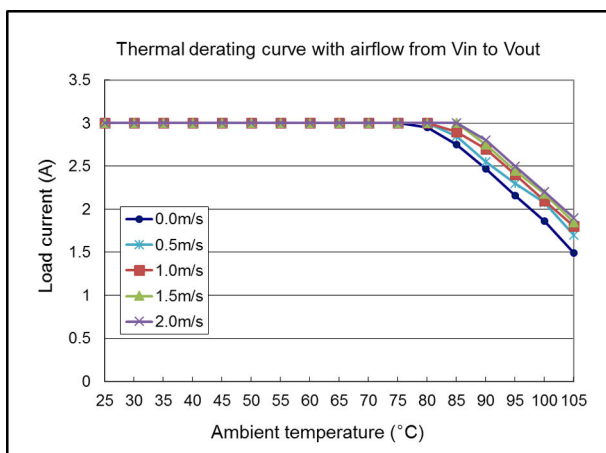


Thermal derating with airflow from  $V_{in}$  to  $V_{out}$   
( $V_{in} = 12\text{ V}$ ;  $V_{out} = 1.5\text{ V}$ )

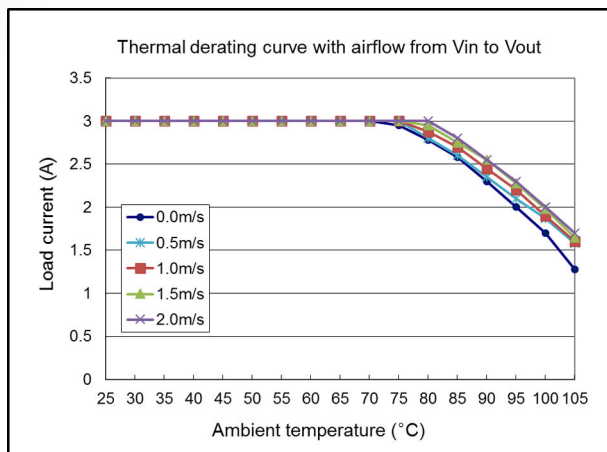


Thermal derating with airflow from  $V_{in}$  to  $V_{out}$   
( $V_{in} = 12\text{ V}$ ;  $V_{out} = 1.8\text{ V}$ )

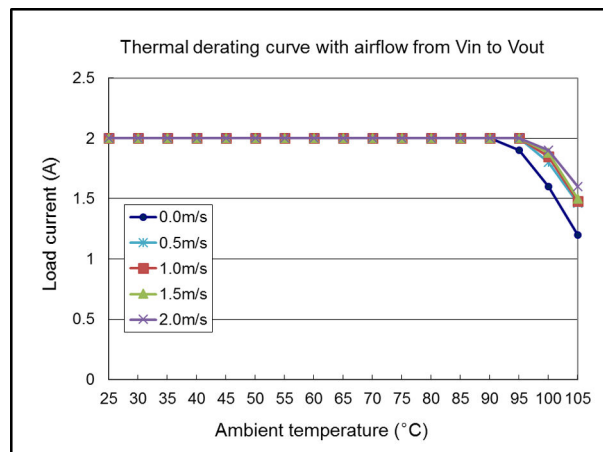


Thermal derating with airflow from  $V_{in}$  to  $V_{out}$   
( $V_{in} = 12\text{ V}$ ;  $V_{out} = 2.5\text{ V}$ )

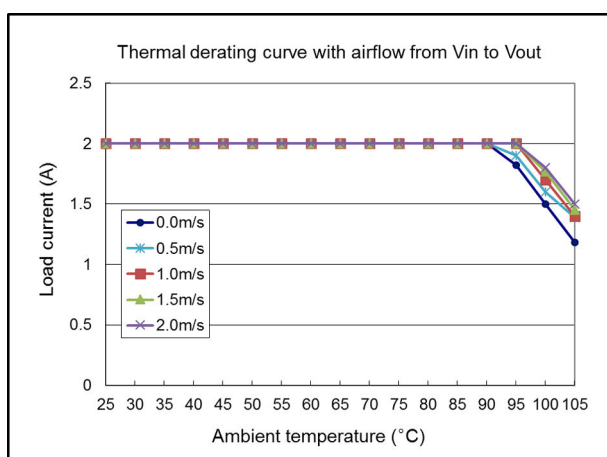


Thermal derating with airflow from  $V_{in}$  to  $V_{out}$   
( $V_{in} = 12\text{ V}$ ;  $V_{out} = 3.3\text{ V}$ )

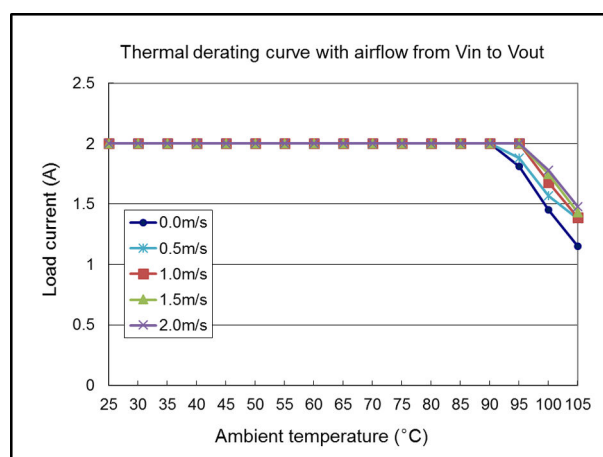

Thermal derating with airflow from  $V_{in}$  to  $V_{out}$   
( $V_{in} = 12\text{ V}$ ;  $V_{out} = 5.0\text{ V}$ )

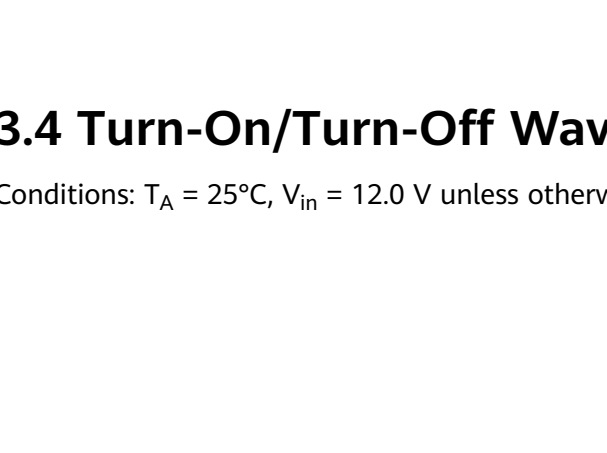


Thermal derating with airflow from  $V_{in}$  to  $V_{out}$   
( $V_{in} = 12\text{ V}$ ;  $V_{out} = 5.2\text{ V}$ )

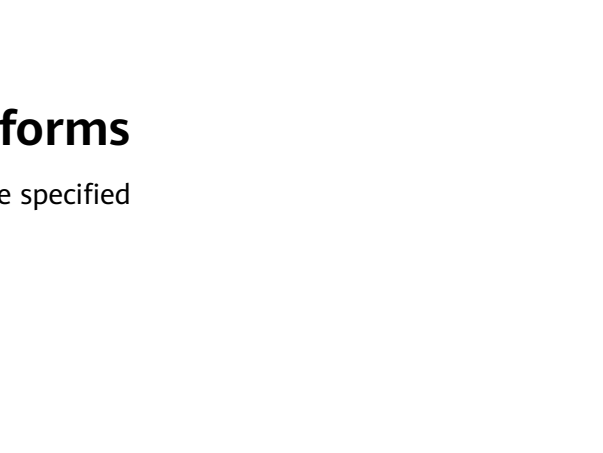


## 3.4 Turn-On/Turn-Off Waveforms

Conditions:  $T_A = 25^\circ\text{C}$ ,  $V_{in} = 12.0\text{ V}$  unless otherwise specified



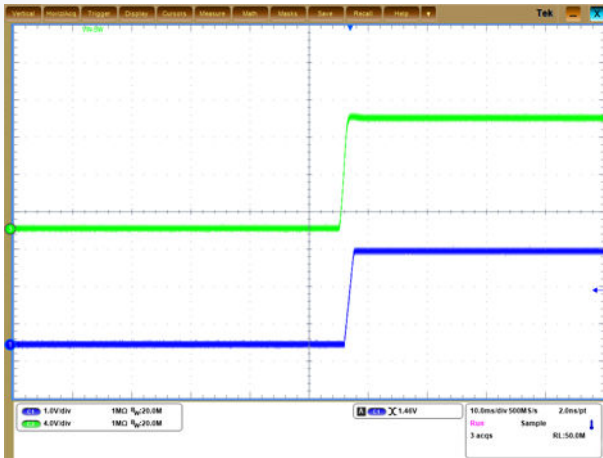


Startup from On/Off

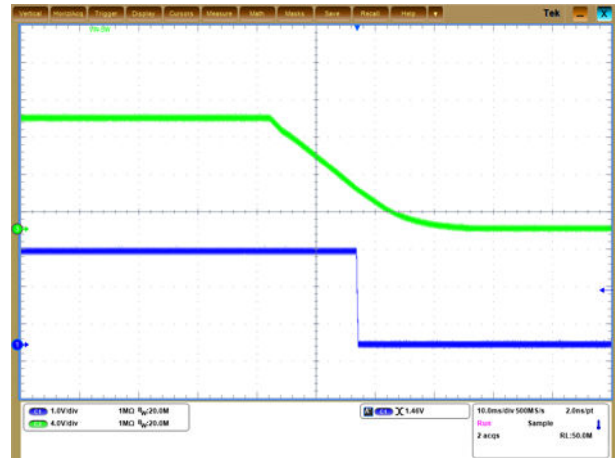

Shutdown from On/Off




Startup by power-on

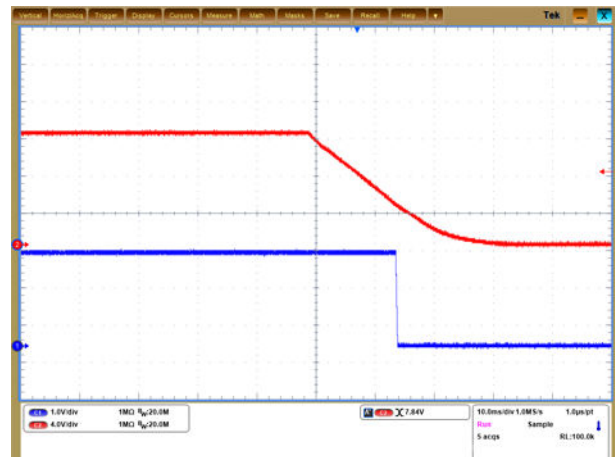


Shutdown by power-off

### 3.5 Output Ripple and Noise

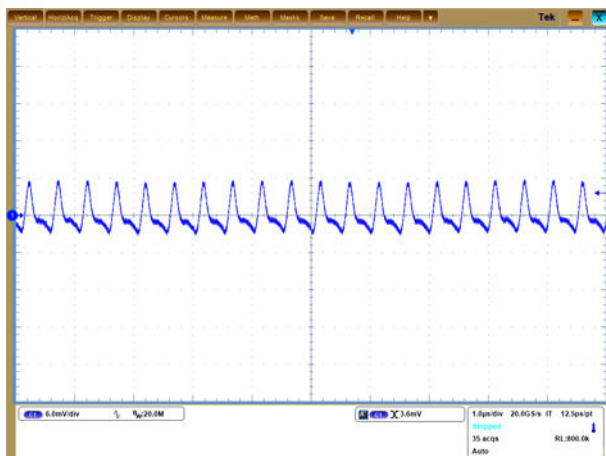


Output voltage ripple (for points B and C in the test setup diagram,  $T_A = 25^\circ\text{C}$ ,  $V_{in} = 12.0\text{ V}$ ,  $I_{out} = 3.0\text{ A}$ )

### 3.6 Dynamic Load Waveform

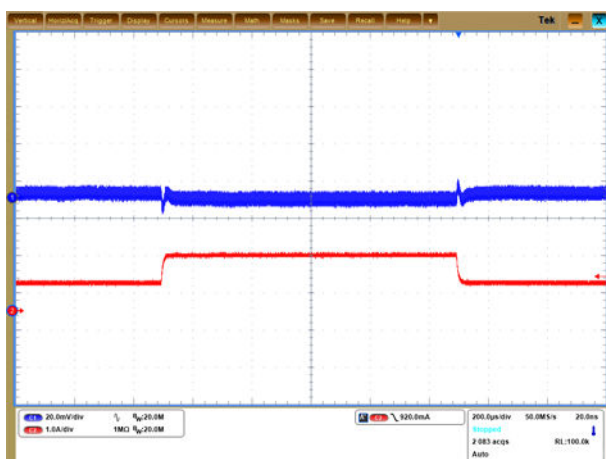

Output voltage dynamic response (load: 25%–50%–25%,  $di/dt = 5\text{ A}/\mu\text{s}$ ,  $T_A = 25^\circ\text{C}$ )

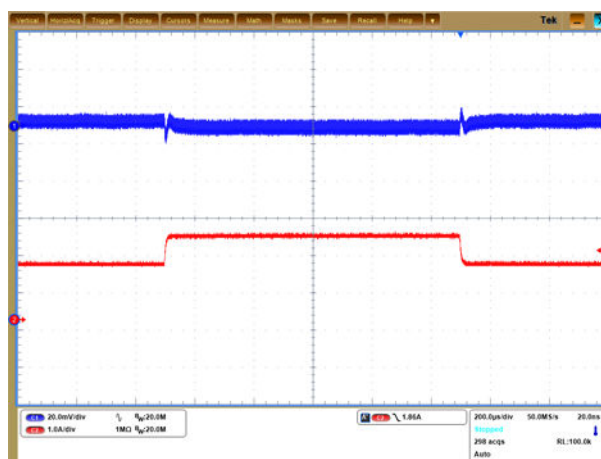

Output voltage dynamic response (load: 50%–75%–50%,  $di/dt = 5\text{ A}/\mu\text{s}$ ,  $T_A = 25^\circ\text{C}$ )




# 4 Control Features

## 4.1 Remote On/Off (EN)

| Logic Enable   | On/Off Pin Level | Module Status |
|----------------|------------------|---------------|
| Positive logic | Low level        | Off           |
|                | High level       | On            |

It is recommended that the On/Off pin be controlled with an open collector transistor or similar device.


**Figure 4-1** Circuit configuration for On/Off function

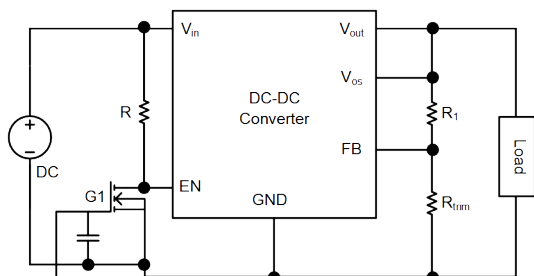

## 4.2 Output Voltage Trim (FB)

The output voltage can be adjusted by connecting an external resistor between the Trim (FB) pin and the GND pin.

**Figure 4-2**  $R_{trim}$  external connections

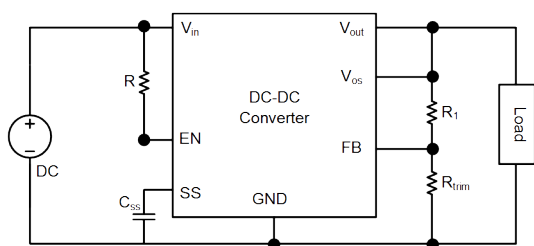

The output voltage varies depending on  $R_{\text{trim}}$ .

#### NOTE

The trim resistor tolerance directly affects the output voltage accuracy.

Relationship between  $R_{\text{trim}}$  and  $V_{\text{out}}$ :

$$R_{\text{trim}} = \frac{8}{V_{\text{out}} - 0.8}$$


The following table describes the mapping between  $V_{\text{out}}$  and  $R_{\text{trim}}$ .

| $V_{\text{out}}$ (V) | $R_{\text{trim}}$ (k $\Omega$ ) |
|----------------------|---------------------------------|
| 0.8                  | -                               |
| 0.9                  | 80                              |
| 1.0                  | 40                              |
| 1.2                  | 20                              |
| 1.5                  | 11.42857143                     |
| 1.8                  | 8                               |
| 2.5                  | 4.705882353                     |
| 3.0                  | 3.636363636                     |
| 3.3                  | 3.2                             |
| 5.0                  | 1.904761905                     |
| 5.2                  | 1.818181818                     |

## 4.3 Power Good Signal (PG)

If the PG function is required, the PG pin needs to be pulled up to a high level (less than 6 V) through a resistor (greater than 3 k $\Omega$ ), and a 10 k $\Omega$  resistor needs to be connected in series to filter the high-frequency PG noise. If the PG function is not required, the pin is left open.

**Figure 4-3** Configuration diagram of PG

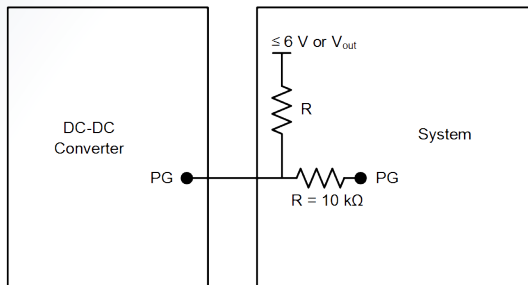

## 4.4 Voltage Tracking (SS)

An external capacitor connected to SS pin sets the internal reference voltage rise time.

# 5 Protection Features

---

## Input Undervoltage Protection

The converter will shut down if the input voltage drops below the undervoltage protection threshold. The converter will start to work again if the input voltage reaches the input undervoltage recovery threshold.

## Output Overcurrent Protection

The converter equipped with current limiting circuitry can provide protection from an output overload or short circuit condition. If the output current exceeds the output overcurrent protection setpoint, the converter will enter constant current mode. When the fault is rectified, the converter will automatically recover.

## Overtemperature Protection

A temperature sensor on the converter senses the average temperature of the converter. It protects the converter from being damaged by high temperatures. When the temperature exceeds the overtemperature protection threshold, the output will shut down. The converter will turn on again when the temperature of the sensed location falls by the value of the overtemperature protection hysteresis.

# 6 Qualification Testing

| Test Item    | Test Condition                                                                                                                                                                 | Samples             | Remarks                                                  |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------------------------------------------------|
| Precondition | Visual inspection → Electrical test → C-SCAN/X-RAY → Bake (125°C, 24 hours) → Moisture soaking → Reflow (3 cycles, 260°C) → Visual inspection → Electrical test → C-SCAN/X-RAY | -                   | MSL 3 prior to reliability test                          |
| LTSL         | $T_A \leq -55^\circ\text{C}$                                                                                                                                                   | 3 lots (25 PCS/lot) | -                                                        |
| HTSL         | $T_A \geq 125^\circ\text{C}$                                                                                                                                                   | 3 lots (77 PCS/lot) | -                                                        |
| TC           | -55°C to 125°C, 1000 cycles, no power                                                                                                                                          | 3 lots (77 PCS/lot) | Test at 500/700/1000 cycle                               |
| TS           | -55°C to 125°C, 1000 cycles, no power                                                                                                                                          | 3 lots (77 PCS/lot) | Ramping rate >20°C/min only, test at 500/700/1000 cycles |
| SD           | Steam aging: 8 h<br>Pb-free: (245±5)°C/(5±0.5)s                                                                                                                                | 22 leads            | -                                                        |
| uHAST        | 130°C/110°C, 85% RH                                                                                                                                                            | 3 lots (77 PCS/lot) | -                                                        |
| HAST         | 130°C/110°C, 85% RH, Vcc                                                                                                                                                       | 3 lots (77 PCS/lot) | -                                                        |
| THB          | 85°C/85% RH, Vcc                                                                                                                                                               | 3 lots (77 PCS/lot) | -                                                        |
| HTOL         | Rated input voltage, $T_j \geq 125^\circ\text{C}$ , 1000 Hours                                                                                                                 | 3 lots (77 PCS/lot) | -                                                        |
| PTC          | -40°C to 100°C, 10°C/min to 20°C/min, rated input voltage, 50% Load, 1000 cycles                                                                                               | 3 lots (77 PCS/lot) | -                                                        |

| Test Item                                          | Test Condition                                                                                                                                                                      | Samples             | Remarks                                                                                                                                                  |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| HALT                                               | Including high temperature step test, low temperature step test, random vibration step test and combined stress test.                                                               | 5-10 PCS            | -                                                                                                                                                        |
| Mechanical shock                                   | 0.5 ms duration, 1500g peak acceleration, 30 shocks                                                                                                                                 | 5-10 PCS            | -                                                                                                                                                        |
| Withstand mechanical strength (for converter)      | 70% compression of thermal conductive pad, 1mm/s                                                                                                                                    | 3 lots (33 PCS/lot) | The appearance and electrical performance are normal. The electrical performance before and after the reliability test complies with the specifications. |
| Salt fog                                           | Class B environment for 5 years: 2% NaCl, 90% RH, 35°C, 20 days                                                                                                                     | 1 lot (16 PCS/lot)  | -                                                                                                                                                        |
| Damp dust                                          | Class B environment for 10 years: dust for 6 days (30 mg/m <sup>3</sup> ) → steady damp heat test for 12 days (95% RH, 40°C) → cyclic damp heat test for 4 days (25°C-40°C, 95% RH) | 1 lot (16 PCS/lot)  | -                                                                                                                                                        |
| Projection moire high temperature deformation test | Temperature range: 25°C-270°C                                                                                                                                                       | 3 PCS               | ≤ 0.08 mm (lead-free package)                                                                                                                            |



# 7 MSL Rating

---


Store and transport the converter as required by the moisture sensitivity level (MSL) rating 3 specified in the IPC/JEDEC J-STD-033.

The surface of a soldered converter must be clean and dry. Otherwise, the assembly, test, or even reliability of the converter will be negatively affected.

# 8 Thermal Consideration

## Thermal Test Point

Sufficient airflow should be provided to ensure reliable operating of the converter. Therefore, thermal components are mounted on the top surface of the converter to dissipate heat to the surrounding environment by conduction, convection, and radiation. Proper airflow can be verified by measuring the temperature at the surface of the converter.

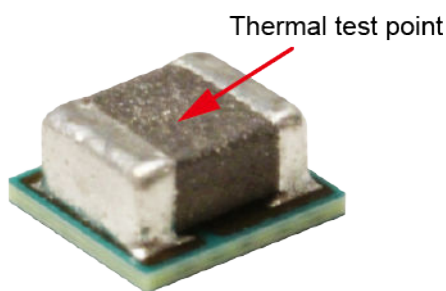

## Power Dissipation


The converter power dissipation is calculated based on efficiency. The following formula reflects the relationship between the consumed power ( $P_d$ ), efficiency ( $\eta$ ), and output power ( $P_o$ ):

$$P_d = P_o (1 - \eta) / \eta$$

# 9 Package Information

The converter is supplied in tape and reel packaging. The following figure shows the tape dimensions.

Unit of measurement: mm

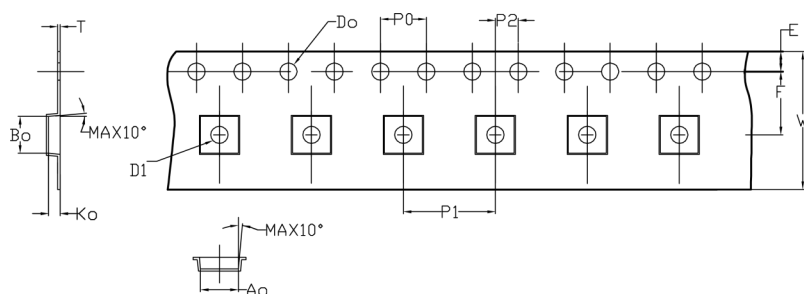

| Item           | W          | A0                                     | B0                                     | K0        | P0        | E         |
|----------------|------------|----------------------------------------|----------------------------------------|-----------|-----------|-----------|
| Specifications | 12.00±0.30 | 3.10±0.10                              | 3.25±0.10                              | 1.70±0.10 | 4.00±0.10 | 1.75±0.10 |
| Item           | F          | D0                                     | D1                                     | P1        | P2        | T         |
| Specifications | 5.50±0.05  | 1.50 <sup>+0.10</sup> <sub>-0.00</sub> | 1.50 <sup>+0.10</sup> <sub>-0.00</sub> | 8.00±0.10 | 2.00±0.05 | 0.30±0.05 |


### NOTE

- Carrier camber does not exceed 1 mm in 250 mm.
- Cumulative tolerance of 10 sprocket hole pitch: ±0.2 mm
- Material: ABS

# 10 Mechanical Consideration (Soldering)

The converter supports reflow soldering techniques. Wave soldering and hand soldering are not allowed. During the reflow process, the peak temperature must not exceed 260°C at any time.

**Figure 10-1** Recommended reflow profile using lead-free solder

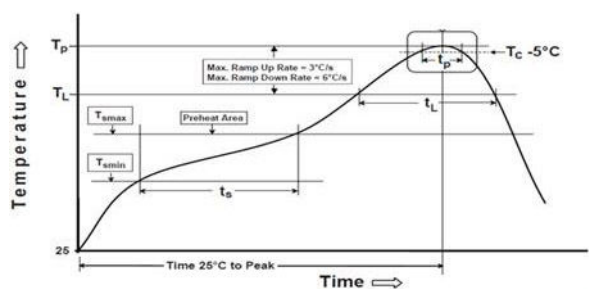

| Item                                                                                    | JEDEC                    |
|-----------------------------------------------------------------------------------------|--------------------------|
| Preheat and soak time: $t_s$ ( $T_{smin}$ – $T_{smax}$ : 150°C–200°C)                   | 60–120s                  |
| Ramp-up rate (from $T_L$ 217°C to $T_p$ 260°C)                                          | $\leq 3^\circ\text{C/s}$ |
| Liquidous temperature time – $t_L$ ( $T > T_L$ 217°C)                                   | 60–150s                  |
| Peak package body temperature ( $T_p$ )                                                 | 260°C                    |
| Time within 5°C of the specified classification temperature ( $T_p - 5^\circ\text{C}$ ) | $t_p < 30\text{s}$       |
| Ramp-down rate (from $T_p$ to $T_L$ )                                                   | $\leq 6^\circ\text{C/s}$ |
| Time from 25°C to peak temperature (from 25°C to $T_p$ )                                | $\leq 8\text{ min}$      |



**Copyright © Huawei Technologies Co., Ltd. 2020. All rights reserved.**

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

## **Trademarks and Permissions**



HUAWEI and other Huawei trademarks are trademarks of Huawei Technologies Co., Ltd.

All other trademarks and trade names mentioned in this document are the property of their respective holders.

## **Notice**

The purchased products, services and features are stipulated by the contract made between Huawei and the customer. All or part of the products, services and features described in this document may not be within the purchase scope or the usage scope. Unless otherwise specified in the contract, all statements, information, and recommendations in this document are provided "AS IS" without warranties, guarantees or representations of any kind, either express or implied.

The information in this document is subject to change without notice. Every effort has been made in the preparation of this document to ensure accuracy of the contents, but all statements, information, and recommendations in this document do not constitute a warranty of any kind, express or implied.

**Huawei Technologies Co., Ltd.**

Huawei Industrial Base  
Bantian, Longgang  
Shenzhen 518129  
People's Republic of China

**[www.huawei.com](http://www.huawei.com)**